
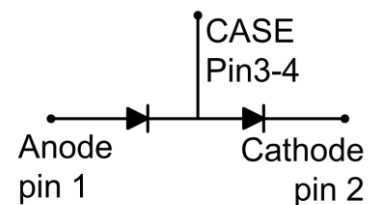


2H15120H6A

1200V-15A RD Half Bridge Module

Product features/产品特点

- Top side cooling technology
顶部散热技术
- Photo glass technology
光阻技术
- Low conduction loss due to low V_F
低导通损耗源于低正向压降
- High surge current capability
高浪涌电流承受能力
- High junction operating temperature capability $T_{j,max}=175^{\circ}\text{C}$
高结温工作能力，最高结温 $T_{j,max}=175^{\circ}\text{C}$
- Halogen free, RoHS compliant
无卤，符合RoHS

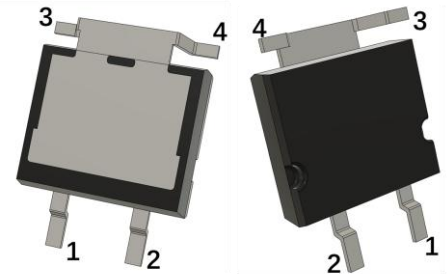

Applications/应用领域

- Input rectifier
输入整流器
- Power factor correction (PFC)
功率因素校正

Key performance parameters/关键性能参数

Parameter/参数	Value/值	Unit/单位
V_{DC}	1200	V
$I_F (@T_C=80^{\circ}\text{C})$	15	A
$V_{F,MAX} (@15\text{A})$	1.02	V



Package parameters/封装信息

Type/型号	Package/封装	Marking/标识	Packaging method/包装方式
2H15120H6A	TSC263-4L	2H15120A	Tape and Reel/卷带包装

2H15120H6A

1200V-15A RD Half Bridge Module



1. Maximum ratings at $T_j=25^{\circ}\text{C}$, unless otherwise specified.

最大额定值 默认 $T_j=25^{\circ}\text{C}$ 除非另有说明

Table 1 Maximum ratings/最大额定值

Parameter 参数	Symbol 符号	Test conditions 测试条件	Value 值	Unit 单位
Repetitive peak reverse voltage 重复峰值反向电压	V_{RRM}		1200	V
Crest working reverse voltage 最高工作反向电压	V_{RWM}		1200	V
Average Forward Current 平均正向电流	$I_{F,AV}$	$T_C=25^{\circ}\text{C}$	30	A
		$T_C=80^{\circ}\text{C}$	15	
Surge non-repetitive forward current, sine halfwave 浪涌非重复峰值正向电流, 正弦半波	$I_{F,SM}$	@60Hz	350	A
Power dissipation 总耗散功率	P_{tot}	$T_j=25^{\circ}\text{C}$	306	W
		$T_j=100^{\circ}\text{C}$	153	



2. Thermal characteristics

热特性

Table 2 Thermal characteristics/热特性

Parameter 参数	Symbol 符号	Test conditions 测试条件	Value/值			Unit 单位
			Min.	Typ.	Max.	
Storage temperature 存储温度	T_{stg}		-55		150	°C
Operating junction temperature 工作结温	T_j		-55		175	°C
Thermal resistance, junction-case 结-壳热阻	$R_{th(j-c)}$				0.49	K/W
Thermal resistance, junction-ambient 结-环境热阻	$R_{th(j-a)}$				61	K/W
Soldering temperature, reflow solderin 焊接温度, 回流焊	T_{sold}	reflow MSL1			260	°C



3. Electrical characteristics at $T_j=25^{\circ}\text{C}$, unless otherwise specified.

电气特性 默认 $T_j=25^{\circ}\text{C}$ 除非另有说明

Table 3 Static characteristics/静态特性

Parameter 参数	Symbol 符号	Test conditions 测试条件	Value/值			Unit 单位
			Min.	Typ.	Max.	
DC blocking voltage 直流阻断电压	V_{DC}	$I_R=10\mu\text{A}$	1200			V
Forward voltage 正向压降	V_F	$I_F=15\text{A}$			1.02	V
Reverse leakage current 反向漏电流	I_R	$V_R=1200\text{V}$			0.6	μA

Table 4 Dynamic characteristics/动态特性

Parameter 参数	Symbol 符号	Test conditions 测试条件	Value/值			Unit 单位
			Min.	Typ.	Max.	
Recovered recovery time 反向恢复时间	t_r	$V_R=800\text{V}, I_F=0.5\text{A}$	500			nS



4. Electrical characteristics diagrams



电气特性图表

Power dissipation/耗散功率

$P_{tot}=f(T_c)$; @ $R_{th(j-c),MAX}$

Typ.Reverse current of voltage /典型漏电与电压函数

$I_R=f(V_R)$; $T_j=25^\circ C$

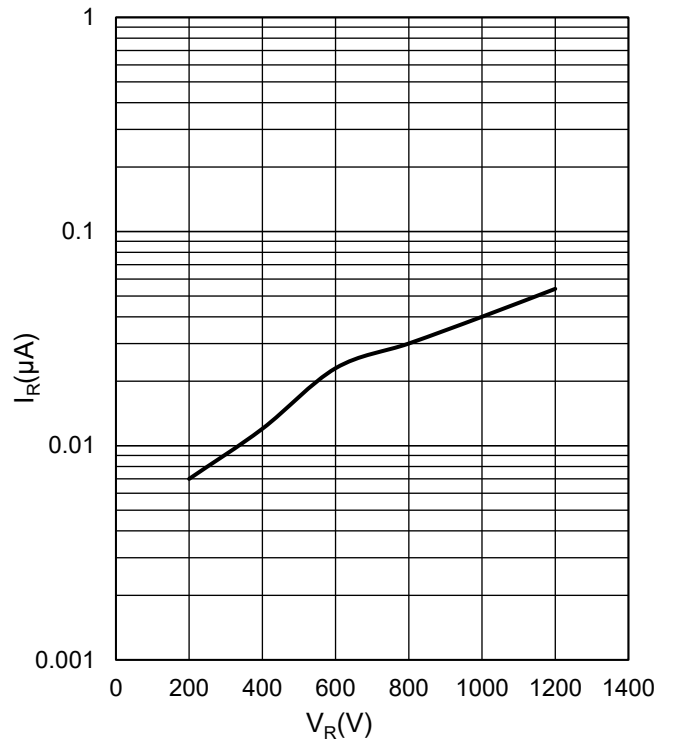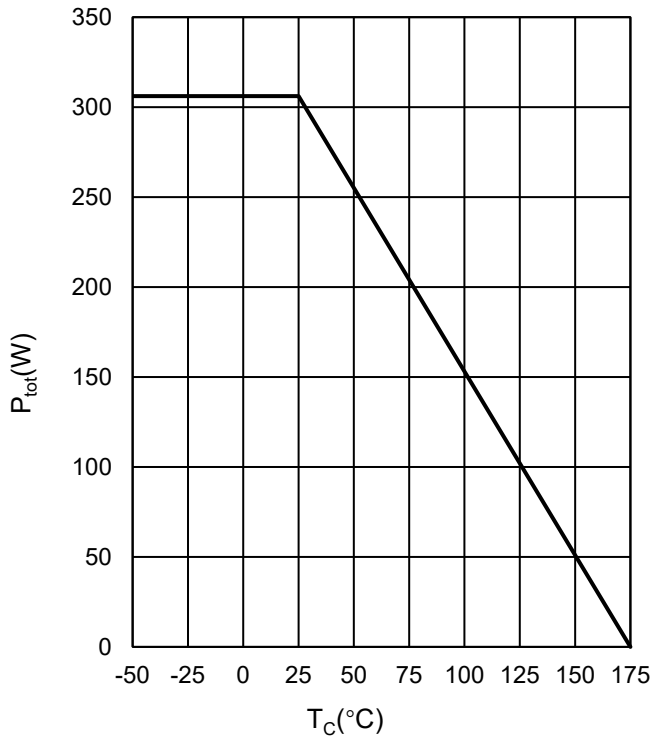




5. Package outline

封装外形

Figure 1. Outline TSC263-4L, dimensions in mm/TSC263-4L外形尺寸 (毫米)

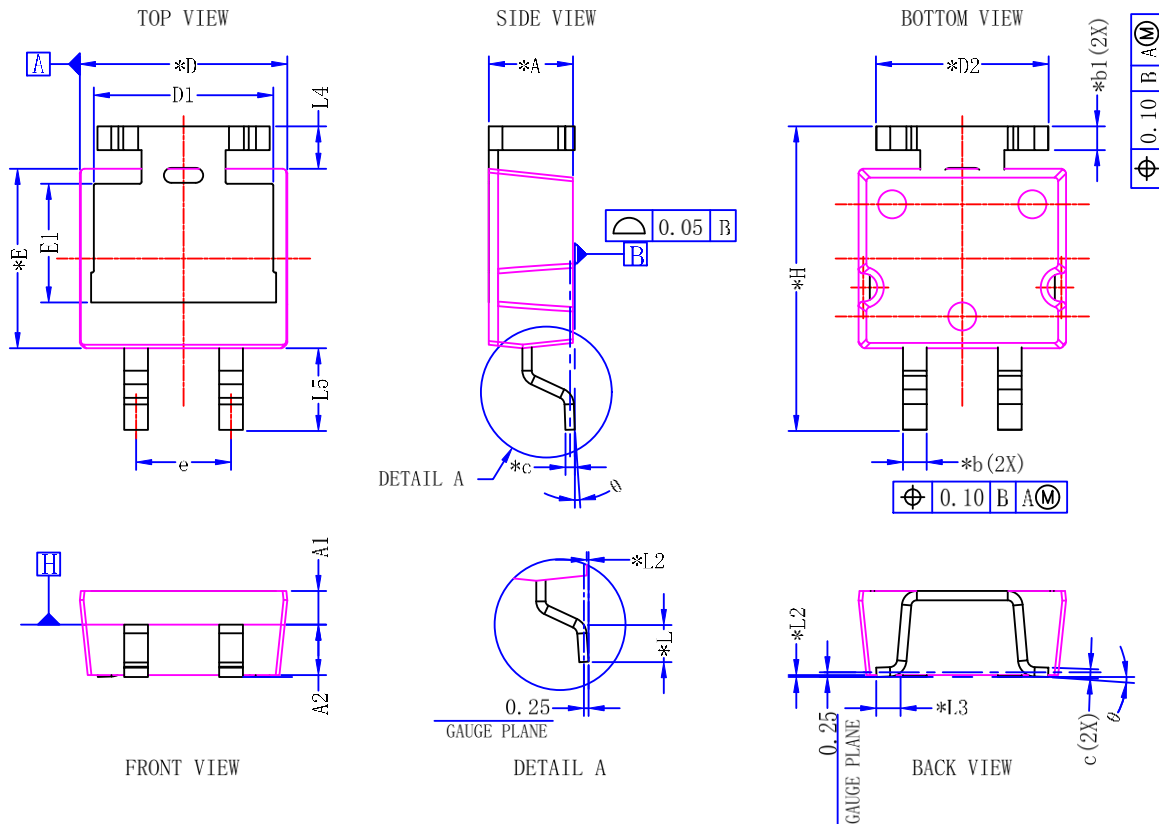

DIM SYMBOL	MIN.	TYP.	MAX.	DIM SYMBOL	MIN.	TYP.	MAX.
*A	4.40	4.50	4.60	*E	9.45	9.60	9.75
A1	1.75	1.80	1.85	E1	6.15	6.35	6.55
A2	2.65	2.70	2.75	e	5.08 BSC		
*b	1.22	1.27	1.32	*H	16.02	16.22	16.42
*b1	1.22	1.27	1.32	*L	1.70	1.90	2.10
*c	0.45	0.50	0.55	*L2	0.05	0.10	0.15
*D	10.95	11.10	11.25	*L3	1.10	1.30	1.50
D1	9.50	9.60	9.70	L4	2.27 REF		
*D2	9.00	9.20	9.40	L5	4.15	4.35	4.55
				∅	0°	-	8°

NOTES:

- ALL DIMENSIONS ARE IN MILLIMETER. ANGLES ARE IN DEGREE.
- DIMENSION "D" DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSIONS. INTERLEAD FLASH SHALL NOT EXCEED 0.150 MM PER SIDE. DIMENSION "E" DOES NOT INCLUDE MOLD FLASH, GATE BURRS, THE GATE BURRS SHALL NOT EXCEED 0.15MM.
- DIMENSIONS D AND E ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.

注:

- 所有尺寸均以毫米为单位。角度以度为单位。
- 尺寸 D 不包括引脚间飞边或突出物。引脚间飞边在每侧不得超过0.15mm。尺寸 E 不包括模具飞边、浇口残余物，浇口残余物不得超过0.15mm。
- 尺寸 D、E 是在塑胶本体的最外极限确定的，不包括模具飞边、连接条残余、浇口残余和引脚间飞边，但包括塑胶本体顶部和底部之间可能存在的任何不匹配或错位。



6. Revision history

修订历史

Table 5 Date and version number/日期与版本号

Date日期	Revision版本	Changes更改内容
2025-11-16	Rev. G 1.0	Target Datasheet (目标规格书)

7. Matters needing attention

注意事项

Appendix 1. Important Technical Guidance, Application Policy, and Copyright Notice/重要技术指南、应用规范与版权声明

[Data and Design Guidance]

The information provided herein, including typical values and application examples, serves as technical guidance only and should not be construed as a formal guarantee of product characteristics. This documentation is intended for qualified engineering personnel, who bear the ultimate responsibility for evaluating the product's suitability for their specific application and compliance with all industry standards.

[Copyright and Revision Management]

We reserve all rights to the intellectual property contained within this document, and unauthorized reproduction is prohibited. For the sake of continuous improvement, the content is subject to change without prior notice. Designers are obligated to consult and use the latest revision of this datasheet to ensure optimal performance and accuracy in their final product.

[Application Safety and Intellectual Property]

Our product supply does not confer any license or right under any third-party intellectual property. Customers are fully responsible for the patent clearance and functional safety of their end application. Furthermore, this product is not intended for use in life-critical or high-risk systems (such as Class III medical devices or aerospace control) unless explicitly approved by us through a dedicated high-reliability agreement.

【数据与设计指引】

本文件中提供的所有信息，包括任何典型值和应用示例，仅作为技术指引，不应被视为对产品特性的正式保证。本资料专供具备资质的工程技术人员使用，客户的技术部门应对产品在特定应用中的适用性和对所有行业标准的符合性负最终评估责任。

【版权与版本管理】

本文件的所有知识产权和版权均归我方所有，严禁未经授权的复制与传播。为持续优化产品性能，本文件内容可能随时变更，恕不另行通知。设计人员有义务查阅并使用最新的版本数据手册，以确保设计准确性并实现最佳系统性能。

【应用安全与知识产权】

我方提供本产品，不应被视为授予任何第三方知识产权的许可或权利。客户应对其终端应用中的功能安全性、系统鲁棒性以及不侵犯任何第三方专利负全部责任。此外，本产品未被设计或认证用于生命维持或极高风险的关键系统。在将本产品用于此类高可靠性应用之前，客户必须设计充分的冗余和安全机制，并事先与我方签署专门的高可靠性供货协议。